

Norsonic AS

P.O.Box 24
N-3421 Lierskogen, Norway
Tel. +47 3285 8900, Fax +47 3285 2208
www.norsonic.com, info@norsonic.com




Customer:

M5 macchina a 3 bar con cabina (come M4)



Microphone position:	Idem come prec.	Operator:	SORGEDIL		
Measurement title:	NOR140_FILE_160324_0005	Date:	24/03/2016 15:17:31		
Measurement duration:	0 00:01:05.000	Period length:	0 00:00:00.100	Filter bandwidth:	1/3-octave
Initial calibration level:		Instrument sensitivity:	-25,1 dB	End calibration level:	

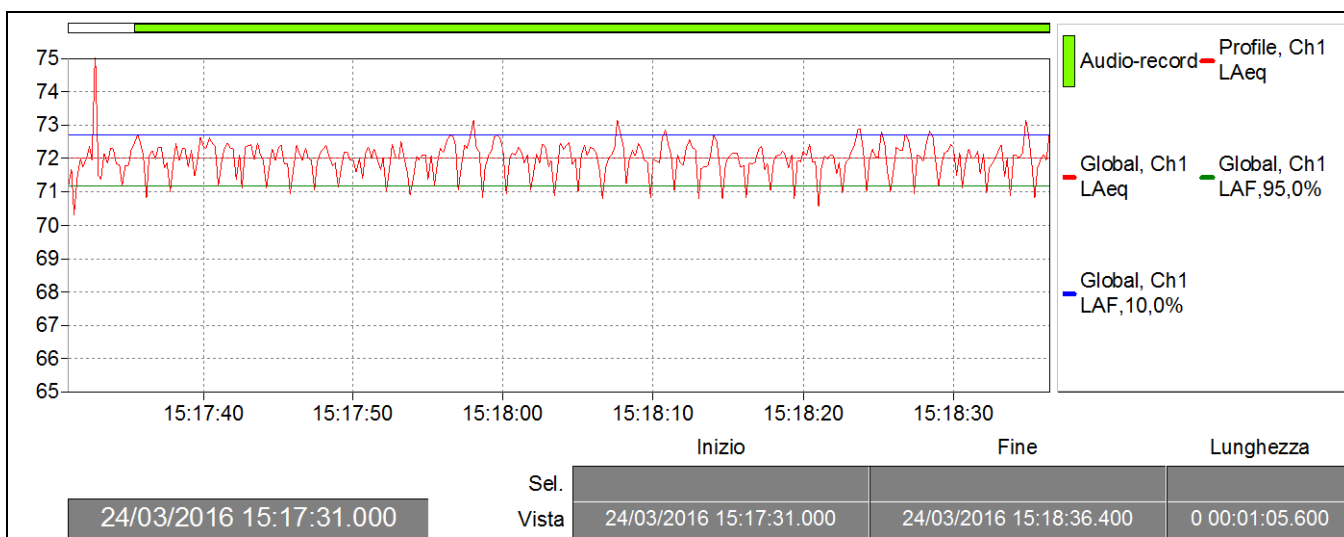

Specialista nell'isolamento acustico


Via V. Emanuele N°7
22060 Cabiante (CO)
Tel. 031.75.69.50 Fax. 0312281356
Cel. 339.13.69.788
P.IVA 03208620132
C.F. SRGVTR79M15F205V
www.sorgedil.it
E-mail. sorgedil@gmail.com

Norsonic AS

P.O.Box 24

N-3421 Lierskogen, Norway

Tel. +47 3285 8900, Fax +47 3285 2208

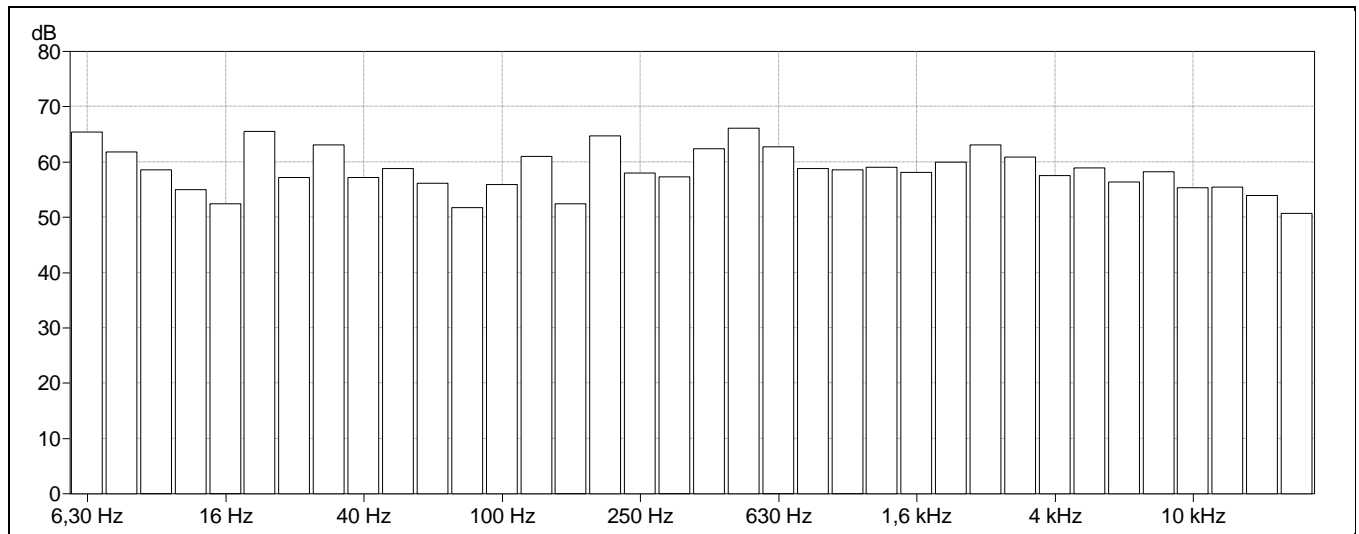www.norsonic.com, info@norsonic.com

	Leq (dB)	LF(max) (dB)	LF(min) (dB)	LI(max) (dB)	LF,10,0% (dB)	LF,95,0% (dB)
A	72,0 dB	74,8 dB	69,4 dB	76,1 dB	72,7 dB	71,2 dB
Z	77,2 dB	87,3 dB	73,9 dB	89,0 dB	78,3 dB	75,3 dB
FRQ						
6,30 Hz	65,4 dB	74,8 dB	46,4 dB	76,0 dB	69,0 dB	53,9 dB
8 Hz	61,8 dB	71,7 dB	46,2 dB	73,0 dB	65,6 dB	51,8 dB
10 Hz	58,6 dB	69,0 dB	40,9 dB	70,1 dB	61,7 dB	50,3 dB
12,5 Hz	55,0 dB	63,0 dB	44,0 dB	64,0 dB	58,3 dB	47,8 dB
16 Hz	52,5 dB	60,5 dB	43,3 dB	62,7 dB	55,3 dB	47,1 dB
20 Hz	65,5 dB	68,9 dB	61,2 dB	69,9 dB	66,9 dB	63,4 dB
25 Hz	57,2 dB	62,8 dB	50,1 dB	64,8 dB	59,7 dB	52,6 dB
31,5 Hz	63,1 dB	70,4 dB	52,6 dB	71,6 dB	65,6 dB	57,6 dB
40 Hz	57,1 dB	65,2 dB	47,8 dB	67,0 dB	59,6 dB	52,2 dB
50 Hz	58,8 dB	65,6 dB	50,1 dB	66,7 dB	61,0 dB	54,3 dB
63 Hz	56,1 dB	61,6 dB	49,1 dB	64,1 dB	58,3 dB	52,3 dB
80 Hz	51,7 dB	56,4 dB	45,0 dB	58,7 dB	53,9 dB	48,2 dB
100 Hz	56,0 dB	61,0 dB	49,6 dB	62,8 dB	57,7 dB	53,0 dB
125 Hz	61,0 dB	65,6 dB	54,8 dB	68,2 dB	62,7 dB	58,1 dB
160 Hz	52,5 dB	55,9 dB	49,2 dB	58,3 dB	53,7 dB	50,7 dB
200 Hz	64,7 dB	71,0 dB	57,5 dB	72,0 dB	66,8 dB	61,1 dB
250 Hz	58,1 dB	61,5 dB	54,3 dB	64,0 dB	59,2 dB	56,3 dB
315 Hz	57,3 dB	62,2 dB	52,9 dB	65,0 dB	58,6 dB	55,3 dB
400 Hz	62,4 dB	68,1 dB	57,6 dB	71,3 dB	64,6 dB	59,9 dB
500 Hz	66,1 dB	69,7 dB	62,0 dB	72,6 dB	67,5 dB	63,7 dB
630 Hz	62,8 dB	66,1 dB	58,7 dB	69,1 dB	64,2 dB	60,3 dB
800 Hz	58,8 dB	61,5 dB	55,2 dB	63,6 dB	60,0 dB	57,0 dB
1 kHz	58,5 dB	64,0 dB	54,5 dB	66,4 dB	60,4 dB	56,1 dB
1,25 kHz	59,0 dB	63,4 dB	55,5 dB	65,7 dB	60,9 dB	57,3 dB
1,6 kHz	58,1 dB	64,4 dB	55,0 dB	66,2 dB	59,2 dB	56,7 dB
2 kHz	60,0 dB	67,0 dB	56,5 dB	69,7 dB	61,0 dB	58,6 dB
2,5 kHz	63,1 dB	67,5 dB	59,2 dB	70,3 dB	64,8 dB	61,7 dB
3,15 kHz	61,0 dB	64,5 dB	57,7 dB	67,3 dB	61,9 dB	59,7 dB
4 kHz	57,6 dB	62,0 dB	53,9 dB	63,7 dB	59,0 dB	55,7 dB

**Specialista nell'isolamento acustico**

Via V. Emanuele N°7

22060 Cabiato (CO)

Tel. 031.75.69.50 Fax. 0312281356

Cel. 339.13.69.788

P.IVA 03208620132

C.F. SRGVT79M15F205V

www.sorgedil.itE-mail. sorgedil@gmail.com

Norsonic AS

P.O.Box 24

N-3421 Lierskogen, Norway

Tel. +47 3285 8900, Fax +47 3285 2208

www.norsonic.com, info@norsonic.com

5 kHz	58,9 dB	64,1 dB	52,5 dB	68,0 dB	61,8 dB	55,7 dB
6,3 kHz	56,4 dB	59,2 dB	52,5 dB	61,3 dB	57,8 dB	54,8 dB
8 kHz	58,3 dB	66,1 dB	54,3 dB	70,4 dB	60,4 dB	55,8 dB
10 kHz	55,4 dB	58,9 dB	51,8 dB	62,1 dB	57,1 dB	54,1 dB
12,5 kHz	55,5 dB	58,4 dB	51,9 dB	61,0 dB	56,9 dB	54,3 dB
16 kHz	54,0 dB	56,8 dB	50,0 dB	59,6 dB	55,5 dB	52,4 dB
20 kHz	50,7 dB	55,8 dB	47,7 dB	59,7 dB	52,3 dB	49,9 dB

SORGEDIL**Specialista nell'isolamento acustico**

Via V. Emanuele N°7

22060 Cabiato (CO)

Tel. 031.75.69.50 Fax. 0312281356

Cel. 339.13.69.788

P.IVA 03208620132

C.F. SRGVTR79M15F205V

www.sorgedil.itE-mail. sorgedil@gmail.com